

Roll unit bearings for tension levelers

Backup roll unit bearings

Work roll · intermediate roll unit bearings

Roll unit bearings made from the newly developed AWS material, have a substantially extended effective life and enhanced reliability. Contributing to rationalization of the high quality of the thin steel sheet manufacturing process and maintenance-free operation of the surface treatment line.



Epoch-making new unit bearings achieve simultaneously both low torque and high sealability.

These bearings are a result of our comprehensive studies ranging from development of materials to grease in order to support advanced surface treatment lines.

High sealability, low torque, and long life

Backup roll unit bearings

High-accuracy, high reliability


Work roll · intermediate roll unit bearings

Newly introduced are new unit bearings which are indispensable for rationalized production of high quality thin steel sheets and maintenance-free operation of surface treatment lines. Development of new material (AWS = Anti Wear Stainless Steel) guarantees long life as a roll material to be used in rolling oil and water. Substantial improvement of wear resistance

through a special heat treatment and fruitful results of other research and development activities have been incorporated into these bearings. These unit bearings for tension levelers are created from NSK's high level technological resources and experience and know-how on all facets of industrial machinery. These are new products superior in long life and high reliability.

Backup roll unit bearings


Construction and specifications of standard backup rolls

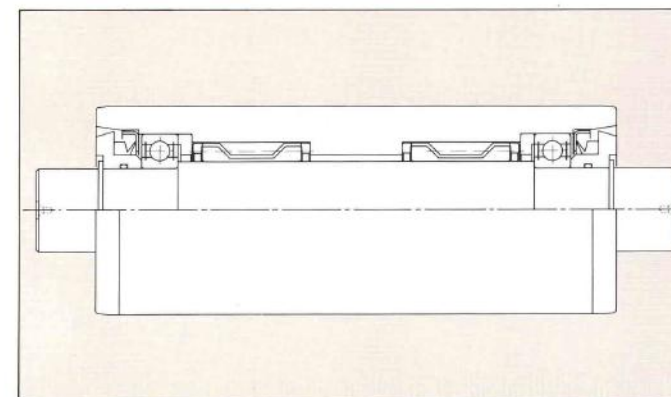


Bearings used	Needle roller bearing+Deep groove ball bearing
Seal	Side seal+Labyrinth seal+Bearing seal
Line speed	0~400m/min
Standard size (mm) [35UMB63]	Roll dia. × Roll length × Overall length 75 × 155 × 205



Construction and specifications of high speed backup rolls (Low torque type)

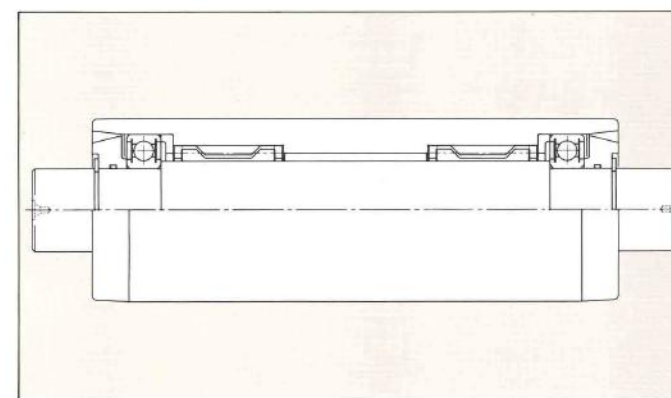

Bearings used	Needle roller bearing+Deep groove ball bearing
Seal	Labyrinth seal + Bearing seal
Line speed	0~1500m/min
Standard size (mm) [40UMB30]	Roll dia. × Roll length × Overall length 75 × 215 × 264

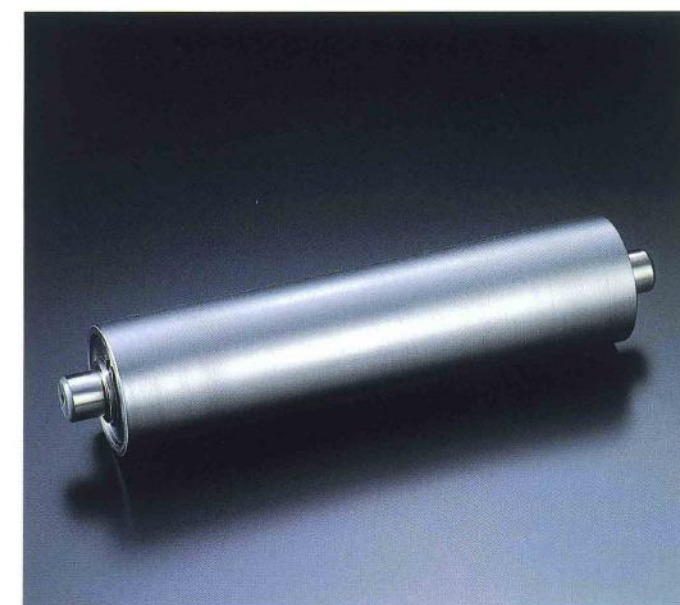

Features

● Highly reliable seal construction

Since the bearing can be used in wet conditions with a large quantity of water and rolling oil, the seal structure consists of a labyrinth seal and side seal. This seal construction ensures high sealability.

● Low torque

Backup rolls are driven by frictional force between work rolls. Low torque is essential because large torque causes slip between rolls. The use of the newly developed seal construction guarantees low torque.

● Roll material AWS superior in corrosion and wear resistance

If rolls are used in an adverse environment exposed to rolling oil and water, then the roll surface may develop premature corrosion and wear. AWS (Anti Wear Stainless Steel), developed as a roll material, has achieved substantial improvement of corrosion and wear resistance.

● High performance grease

Grease, superior in durability and water resistance, is filled to an adequate quantity to ensure longer, maintenance-free operation.

● Increase in the roll strength

The needle roller bearings are used to secure the roll thickness within the limited roll dimensions and to enhance the roll strength.

● Appropriate crowning

The backup rolls are provided with adequate crowning to prevent damage on the work roll surface under edge load.

● Roll surface roughness

The surface roughness of the backup roll has been improved to prevent surface damage of the work roll.

● High precision roll runout


As the backup rolls are divided, the roll height difference has been minimized to ensure even load distribution among rolls, thereby suppressing roll runout.

Backup roll unit bearings


NSK's newly developed seal (Utility model pending S62-004422)

Low torque and sealability are features required in backup rolls and have a contrary relationship.

The use of our newly developed seal construction has resolved such problems.

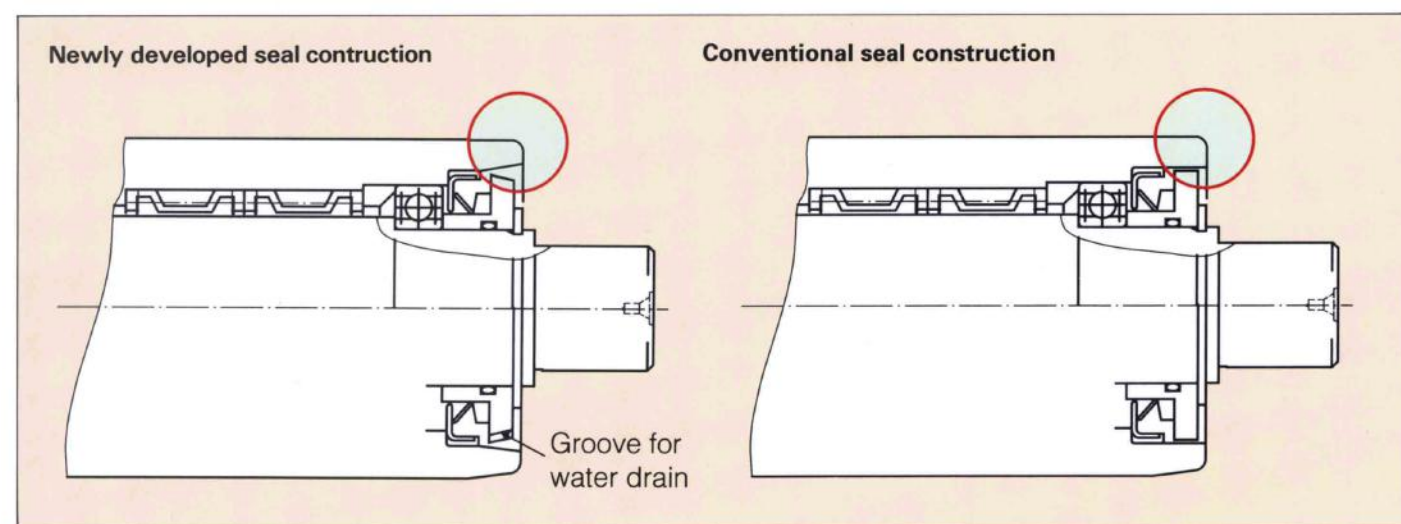


Remarks Regarding the boundary dimensions, please refer to the dimension table in Pages 5 and 6.

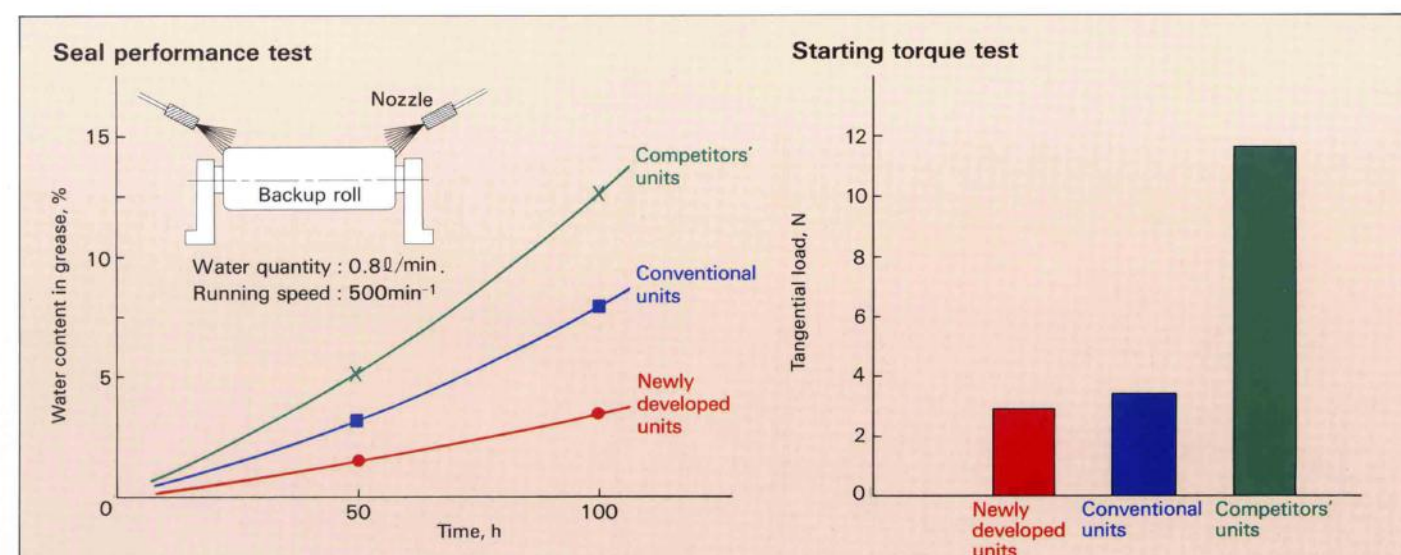


NSK's newly developed roll material AWS (Anti Wear Stainless Steel)

The use of newly developed AWS has achieved substantial improvement of corrosion resistance. Special heat treatment to enhance the hardness of the roll surface layer has achieved substantially improved wear resistance.

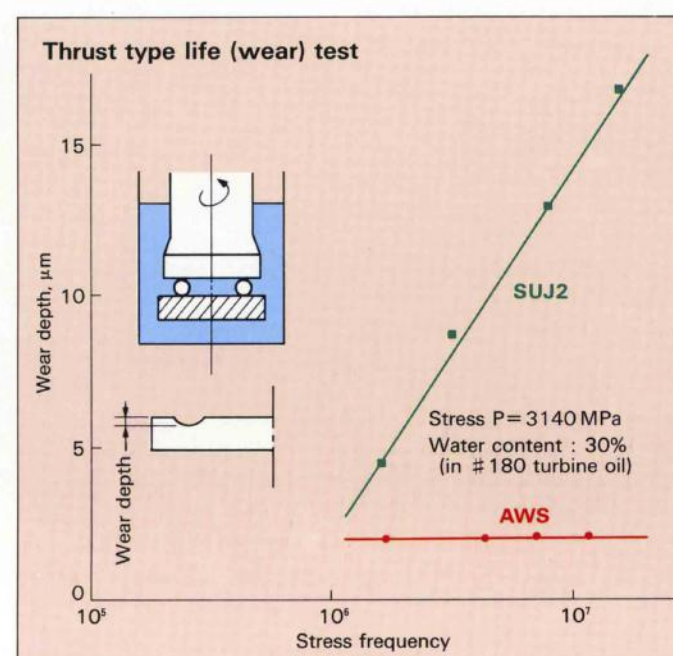

Work roll·intermediate roll unit bearings

Construction and specifications of work roll·intermediate roll units

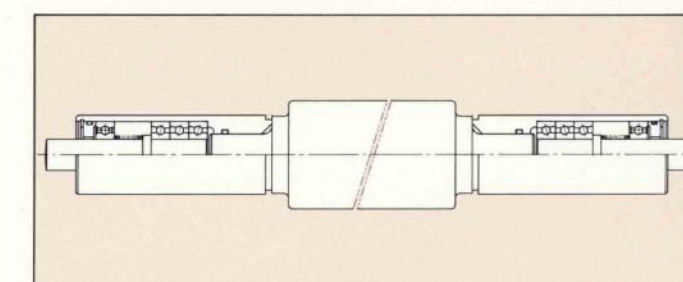

Bearings used	Combined angular contact ball bearings+Deep groove ball bearing
Seal	Labyrinth seal + Bearing seal
Line speed	0~1500m/min
Standard size (mm)	Roll dia. × Roll length × Overall length
[12UMB08-WX3015]	30 × 1530 × 1730




Features

- **High precision roll runout**
Small diameter and long roll with high running accuracy.
- **High load capacity**
Multi-row angular-contact ball bearings are used to increase the load capacity.
- **High performance grease**
Filling of an adequate quantity of grease, which is superior in durability and water resistance, has enabled an extension of maintenance-free operation.
- **Roll surface roughness**
To prevent surface damage of the products, the surface roughness of the work roll has been improved.

- **High sealability**
The labyrinth seal and seal in the deep groove ball bearings have achieved the high sealability.
- **Low torque**
Low torque angular contact and deep groove ball bearings are used with low torque grease.
- **Corrosion resistant thrust block**
Rolls exposed to rolling oil and water, result in rusting of the thrust block. Stainless steel has been used to enhance corrosion resistance and ensure longer life.

Inner ring and outer ring rotating unit bearings

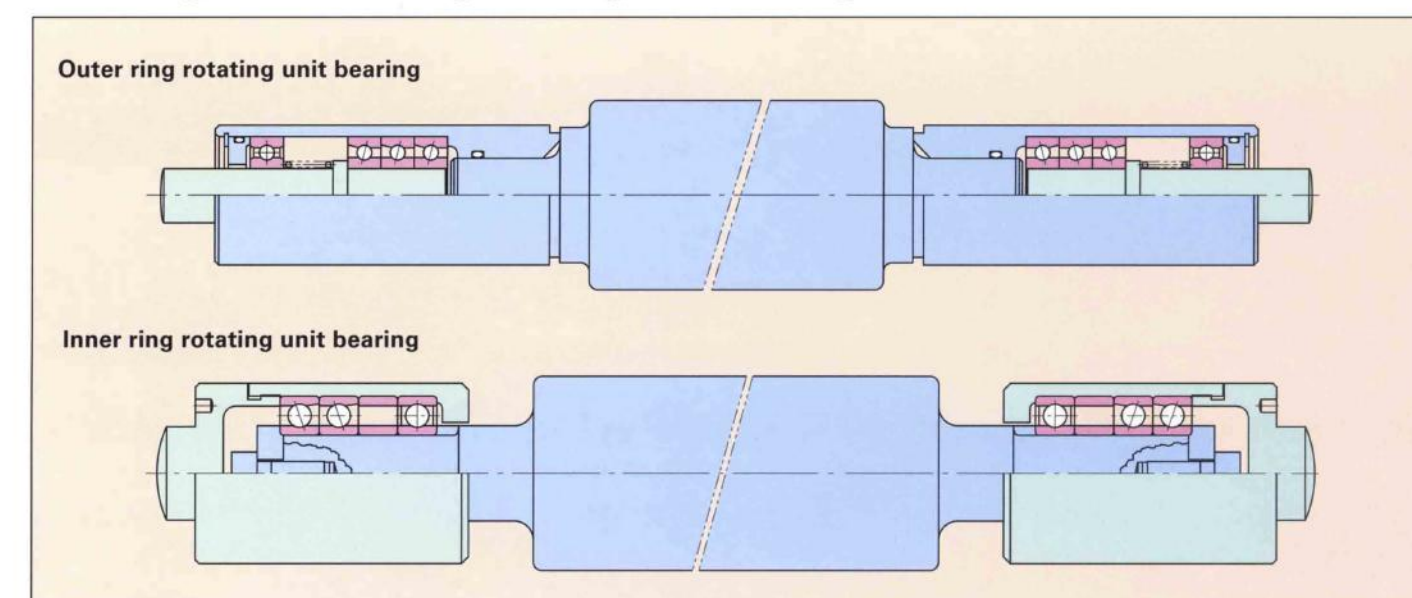


- **Handling of the thrust blocks**
The thrust blocks color-identified in the figure above are also available as a single unit. For boundary dimensions, refer to the dimension table in Pages 7 and 8.
Please contact NSK for details.


- **Re-grinding service**
High performance, small diameter, and high accuracy work units with high speed thrust blocks on both sides are easy to handle. We offer after-sales care by providing a re-grinding service.
The same service is available for backup rolls.
Standard re-grinding amount : 0.1mm
Standard number of re-grinds : 3~4times
Note that the re-grinding amount and times may be modified depending on the state of the roll surface.

Backup roll unit bearings

Composition of bearing numbers

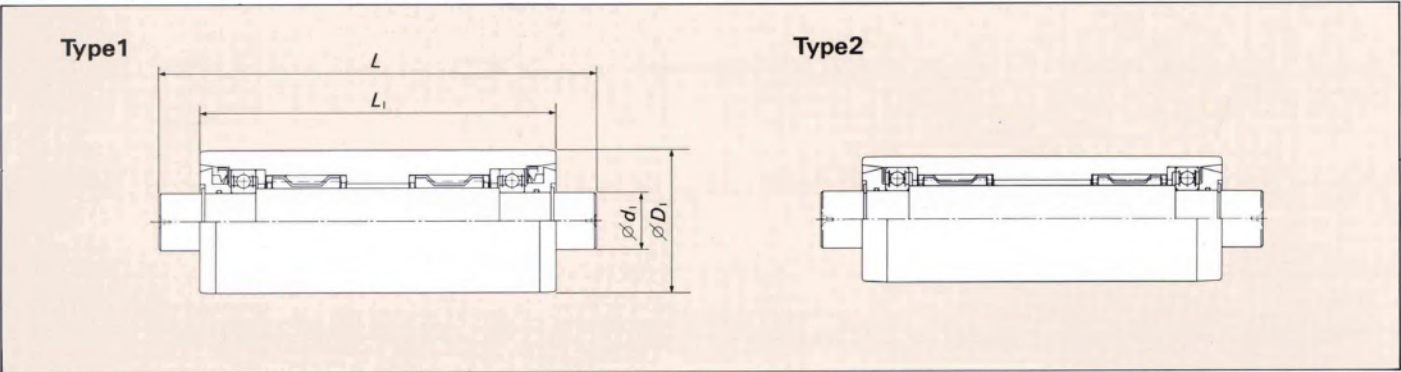

Unit bearing numbers	Type	Boundary dimensions (mm)			
		D ₁	L	L ₁	d ₁
25UMB02	4	63.5	189	140	22.085
25UMB03	4	63.5	150.5	101.5	22.085
25UMB12	4	63.5	189.5	139.5	22.000
25UMB13	4	63.5	151	101	22.000
25UMB14	4	63.5	140	90	22.000
27UMB07	1	50.0	163	135	22.000
27UMB08	1	50.0	213	185	22.000
30UMB04	2	65.0	173	140	22.000
30UMB05	2	65.0	261	228	22.000
34UMB23	3	75.0	264	215	26.000
34UMB24	3	75.0	359	310	26.000
35UMB42	1	63.0	214	173	22.000
35UMB43	1	63.0	321	280	22.000
35UMB63	1	75.0	205	155	30.000
35UMB64	1	75.0	308	258	30.000
40UMB08	3	90.0	218	170	31.000
40UMB09	3	90.0	328	280	31.000
40UMB21	1	75.0	230	180	30.000
40UMB22	1	75.0	342	292	30.000
40UMB30	2	75.0	264	215	26.000
40UMB31	2	75.0	359	310	26.000
44UMB08	2	75.0	215	170	30.000
44UMB09	2	75.0	310	265	30.000
55UMB11	5	140.0	249	200	55.000
55UMB12	5	140.0	349	300	55.000
60UMB11	1	101.0	246	206	45.000
60UMB12	1	101.0	354	314	45.000
80UMB04	1	130.0	513	450	69.500
80UMB05	1	130.0	328	265	69.500

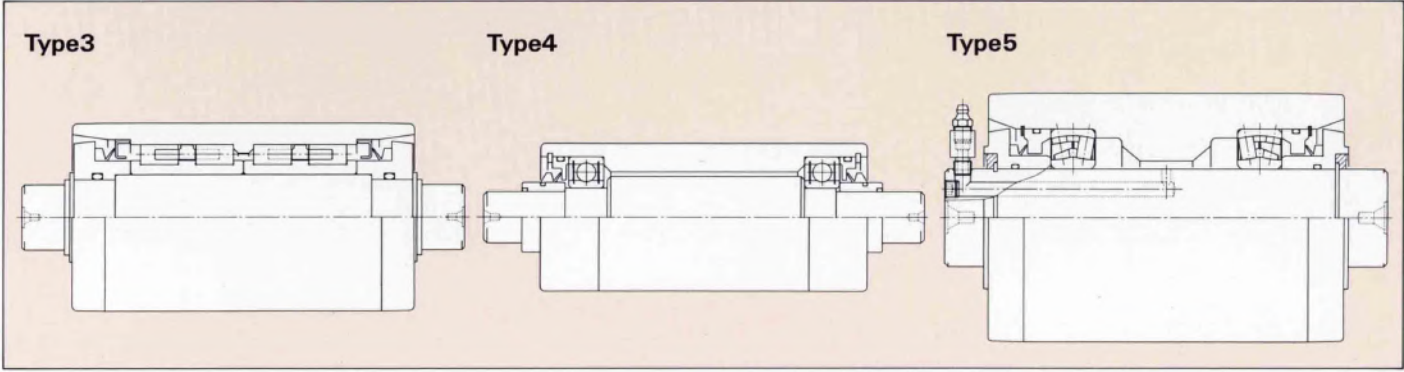

Basic load ratings (N)		Allowable speed (min ⁻¹)	Mass approx	
			(kg)	{lb}
CrH	CorH			
22 800	15 700	6 000	3.3	7.3
22 800	15 700	6 000	2.5	5.5
22 800	15 700	6 000	2.3	5.1
22 800	15 700	6 000	3.2	7.0
22 800	15 700	6 000	2.1	4.6
89 000	143 000	6 000	1.9	4.2
89 000	143 000	6 000	2.6	5.7
107 000	171 000	7 300	3.3	7.3
107 000	171 000	7 300	5.4	11.9
147 000	234 000	4 100	6.5	14.3
147 000	234 000	4 100	9.1	20.0
87 000	165 000	4 900	3.9	8.6
87 000	165 000	4 900	6.3	13.9
119 000	184 000	4 500	5.0	11.0
119 000	184 000	4 500	8.5	18.7
141 000	208 000	4 500	6.8	15.0
141 000	208 000	4 500	10.5	23.1
136 000	237 000	4 100	4.8	10.6
136 000	237 000	4 100	8.3	18.3
136 000	237 000	5 700	7.4	16.3
136 000	237 000	5 700	10.6	23.3
133 000	294 000	5 700	5.6	12.3
133 000	294 000	5 700	8.7	19.1
209 000	285 000	2 700	21.2	46.6
209 000	285 000	2 700	32.5	71.5
229 000	450 000	3 000	11.9	26.2
229 000	450 000	2 700	18.2	40.0
315 000	825 000	2 600	42.8	94.2
261 000	695 000	2 600	26.0	57.2

Work roll · intermediate roll unit bearings

Composition of bearing numbers

8 UMB 04 + WX 2519

Bearing bore dia.

Special unit


Serial number

- Roll barrel length

Roll barrel dia.

WX : Work roll


Roll type IX : Intermediate roll

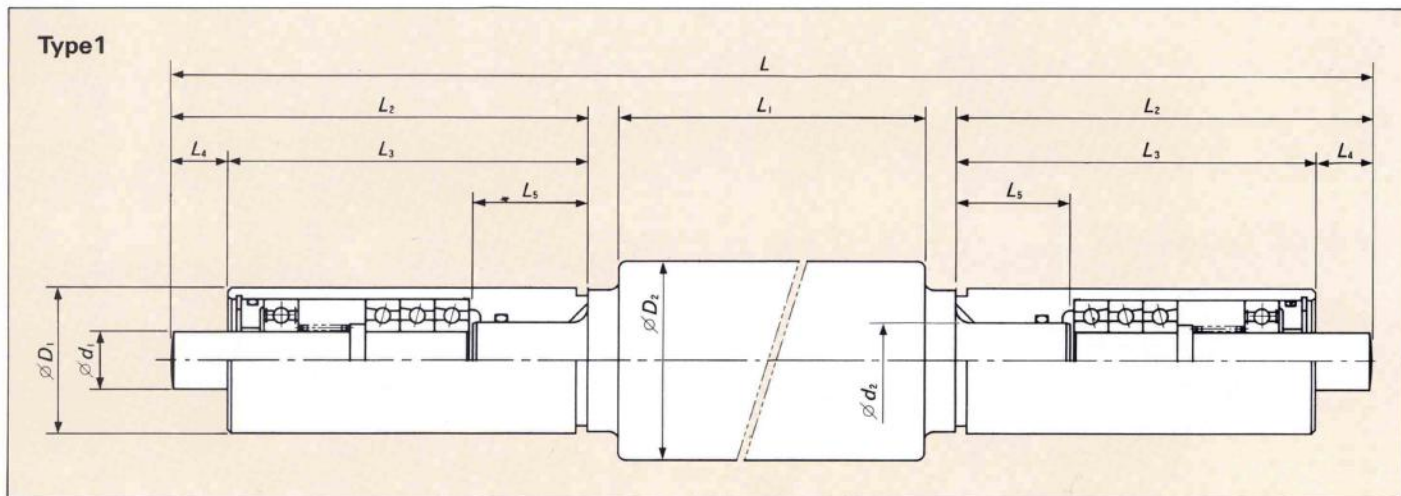

Unit bearing numbers	Type	Boundary dimensions (mm)					
		d_1	D_1	D_2	L	L_1	d_2
8UMB04+ WX2519 (IX2519)	2	8	26	25	2132	1900	15
8UMB05+ WX3013 (IX3013)	1	8	26	30	1466	1250	15
10UMB10+ WX2518 (IX2518)	2	10	24	25	2033.5	1800	10
12UMB08+ WX3015 (IX3015)	2	12	28	30	1730	1500	18
12UMB17+ WX3019 (IX3019)	2	12	32	30	2132	1900	20
12UMB22+ WX3015 (IX3015)	1	12	32	30	1733.5	1500	18
15UMB02+ WX4015 (IX4015)	2	15	38	40	1730	1500	22
15UMB08+ WX4022 (IX4022)	1	15	38	40	2433.5	2200	20
15UMB14+ WX4018 (IX4018)	1	15	38	40	2100	1850	22
25UMB23+ WX8022 (IX8022)	2	25	56	80	2433.5	2200	30

Note: D_z , L , and L_1 are actual dimensions. Fabrication is made according to the user's request. Specify when ordering.

Type2

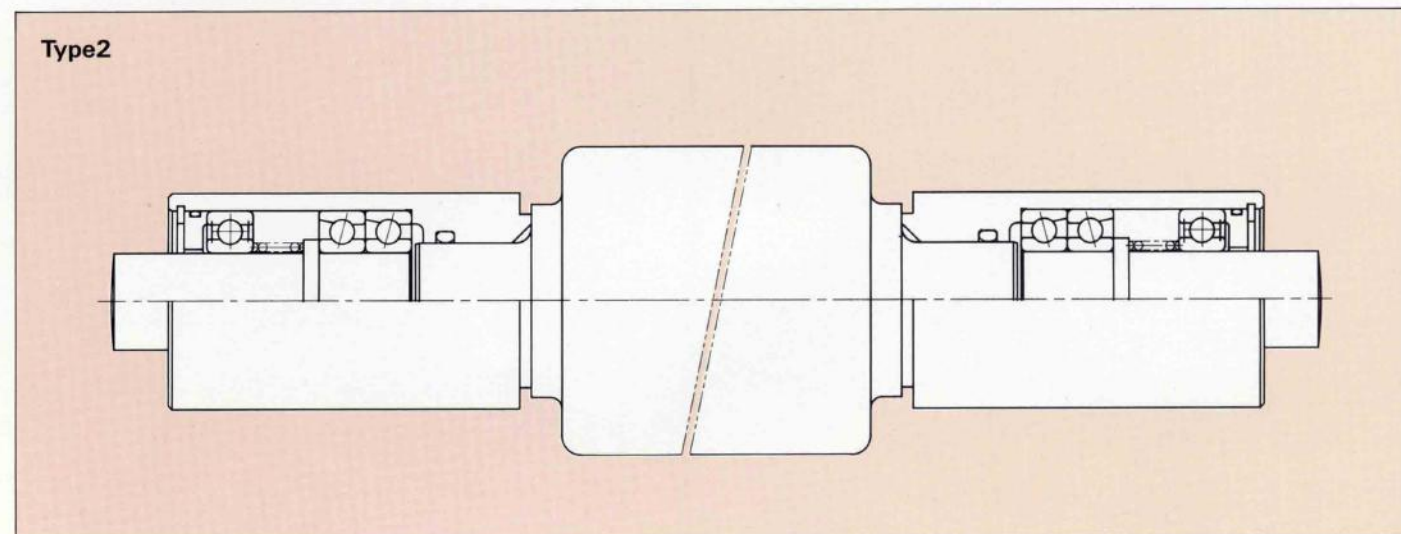

Boundary dimensions (mm)				Allowable axial load (N)	Allowable speed (min ⁻¹)	Mass approx	
L ₂	L ₃	L ₄	L ₅			(kg)	{lb}
110	100	10	31	3 700	40 000	7.6	16.8
102	92	10	27	5 600	35 000	7.5	16.5
91.75	80	11.75	15	2 390	32 000	7.4	16.3
100	85	15	25	4 150	30 000	9.1	20.0
110	100	10	33	6 850	28 000	10.5	23.1
108.75	94	14.75	30	10 300	25 600	9.2	20.3
100	85	15	25	7 500	28 000	16.2	35.7
108.75	94	14.75	30	11 300	22 400	23.0	50.7
110	95	15	25	11 300	22 400	17.2	37.9
108.75	94	14.75	30	14 800	15 000	90.0	198.4



Note: Thrust block, work roll, and intermediate roll may be fabricated separately. Specify when ordering.

Roll unit bearings for tension levelers



Outline of tension leveler

The leveler applies bending and tension simultaneously to original sheets to develop plastic elongation in order to straighten the material concerned (thin steel sheet) and to

ensure uniform strip lengths. Normally, the elongation leveler has one block of three rows for one work roll, two intermediate rolls, and a few backup rolls.

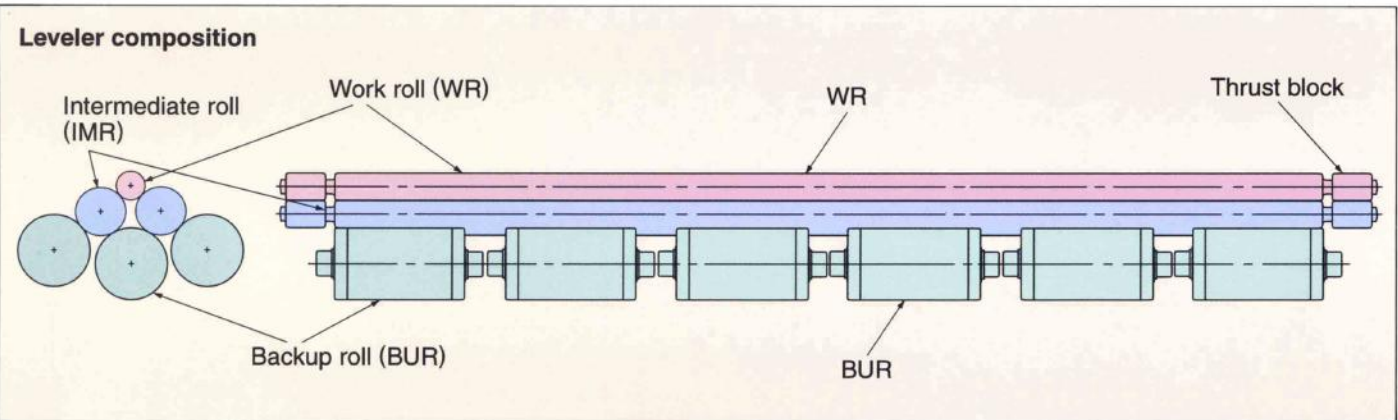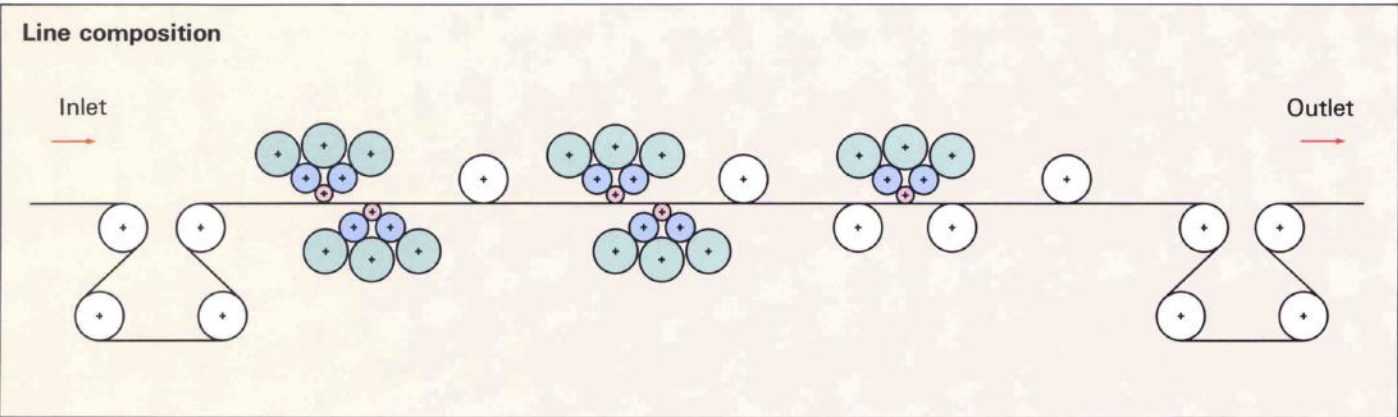


Example of leveler composition

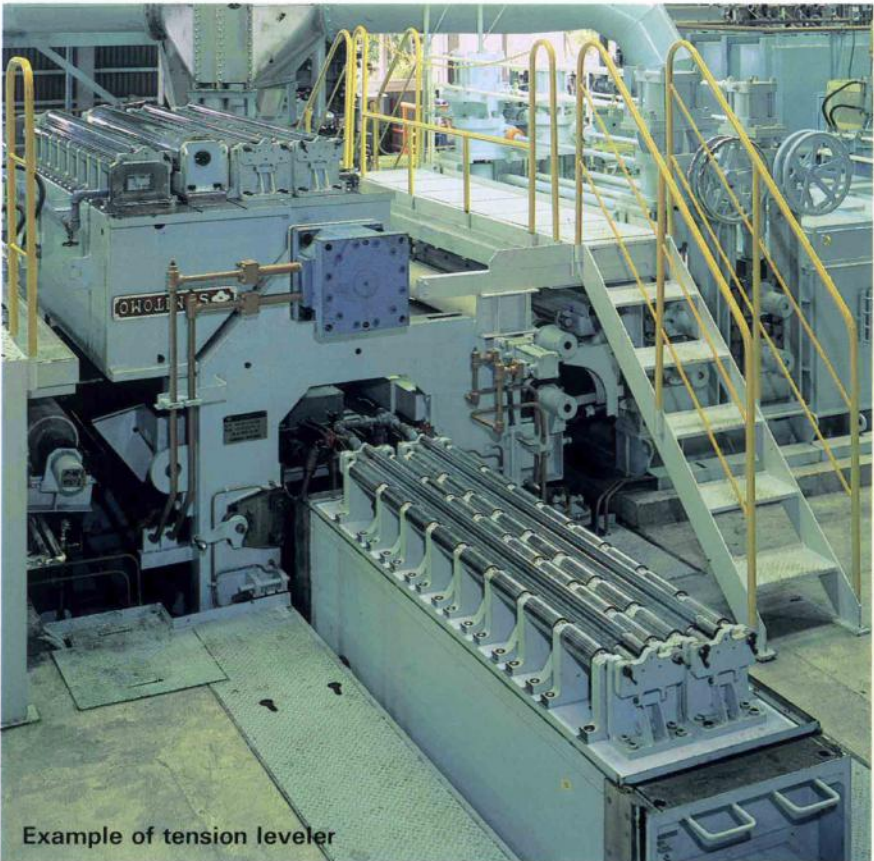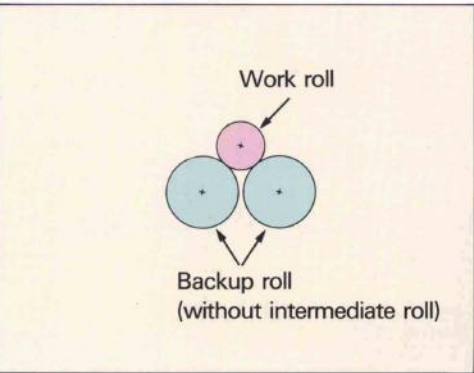


Example of tension leveler

Typical unit bearings for tension levelers


Galvanizing line

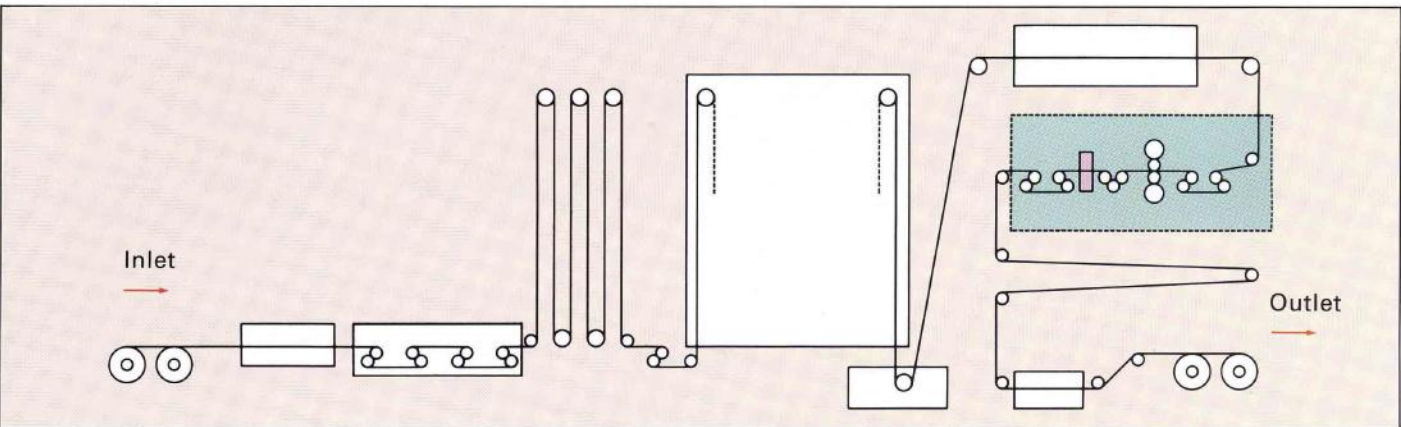


35UMB63

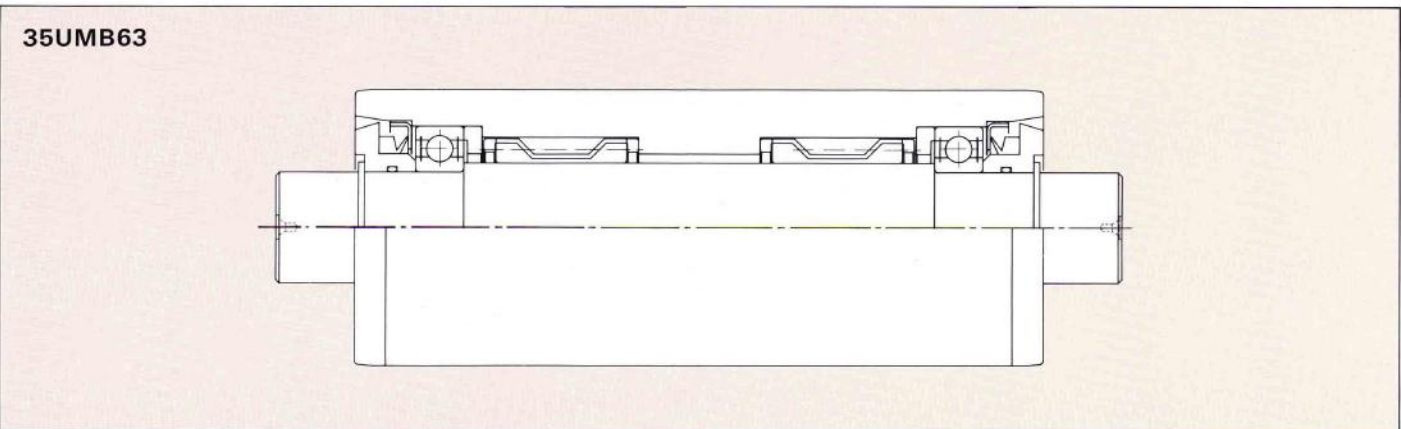

Continuous pickling line

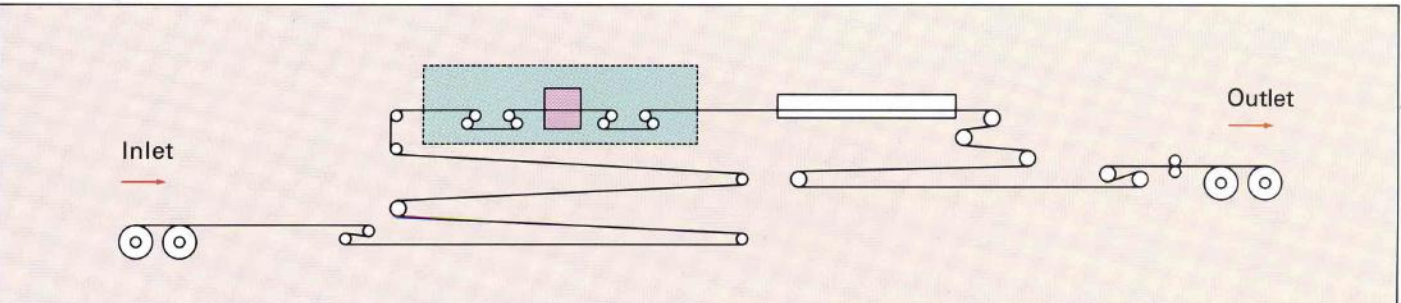

55UMB11

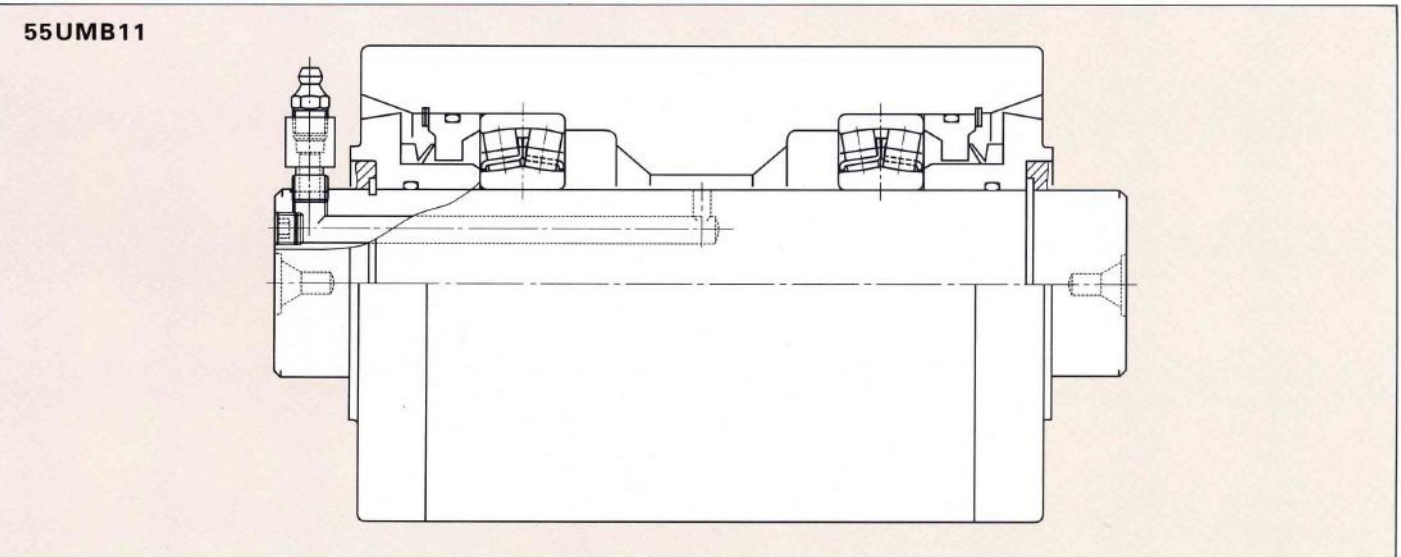

Worldwide Sales Offices

NSK Ltd.-Headquarters, Tokyo, Japan www.nsk.com
INDUSTRIAL MACHINERY BEARINGS DIVISION-HEADQUARTERS tel: 03-3779-7227
AFTERMARKET BUSINESS DIVISION-HEADQUARTERS tel: 03-3779-8893
AUTOMOTIVE BUSINESS DIVISION-HEADQUARTERS tel: 03-3779-7189
NEEDLE ROLLER BEARINGS STRATEGIC tel: 03-3779-7288
DIVISION-HEADQUARTERS
PRECISION MACHINERY & PARTS tel: 03-3779-7163
DIVISION-HEADQUARTERS

Africa

South Africa:

NSK South Africa (Pty) Ltd.
Johannesburg tel: 011-458-3600

Asia and Oceania

Australia:

NSK Australia Pty. Ltd. www.au.nsk.com
Melbourne tel: 03-9764-8302

China:

NSK Hong Kong Ltd.
Hong Kong tel: 2739-9933

Kunshan NSK Co., Ltd.
Kunshan Plant tel: 0512-5771-5654

Changshu NSK Needle Bearing Co., Ltd.
Jiangsu Plant tel: 0512-5230-1111

Guizhou HS NSK Bearings Co., Ltd.
Anshun Plant tel: 0853-3522332

NSK Steering Systems Dongguan Co., Ltd.
Dongguan Plant tel: 0769-262-0960

Zhangjiagang NSK Precision Machinery Co., Ltd.
Jiangsu Plant tel: 0512-5867-6496

Timken-NSK Bearings (Suzhou) Co., Ltd.
Jiangsu Plant tel: 0512-6665-5666

NSK China Technology Center
Jiangsu tel: 0512-5771-5654

NSK (Shanghai) Trading Co., Ltd.
Shanghai tel: 021-6235-0198

NSK Representative Offices www.nsk.com.cn

Beijing tel: 010-6590-8161

Guangzhou tel: 020-3786-4833

Anshun tel: 0853-3522522

Chengdu tel: 028-8661-4200

Shenzhen tel: 0755-25904886

Changchun tel: 0431-8988682

NSK (China) Investment Co., Ltd.
Shanghai tel: 021-6235-0198

India:
Rane NSK Steering Systems Ltd.
Chennai tel: 044-274-66002

NSK Ltd. India Branch Office
Chennai tel: 044-2446-6862

Gurgaon tel: 124-4104530

Indonesia:
PT. NSK Bearings Manufacturing Indonesia
Jakarta tel: 021-898-0155

PT. NSK Indonesia
Jakarta tel: 021-252-3458

Korea:

NSK Korea Co., Ltd.
Seoul tel: 02-3287-0300

Changwon Plant tel: 055-287-6001

Malaysia:

NSK Bearings (Malaysia) Sdn. Bhd. www.my.nsk.com
Kuala Lumpur tel: 03-7803-8859

NSK Micro Precision (M) Sdn. Bhd. www.my.nsk.com
Malaysia Plant tel: 03-8961-6288

New Zealand:

NSK New Zealand Ltd. www.nsk-rhp.co.nz
Auckland tel: 09-276-4992

Philippines:

NSK Representative Office
Manila tel: 02-759-6246

Singapore:

NSK International (Singapore) Pte Ltd.
Singapore tel: 65-6273-0357

NSK Singapore (Pte) Ltd. www.nsk-singapore.com.sg
Singapore tel: 65-6278-1711

Taiwan:

Taiwan NSK Precision Co., Ltd.
Taipei tel: 02-2509-3305

Taiwan NSK Technology Co., Ltd.
Taipei tel: 02-2509-3305

Thailand:

NSK Bearings (Thailand) Co., Ltd.
Bangkok tel: 02-6412-150

NSK Bearings Manufacturing (Thailand) Co., Ltd.
Chonburi tel: 038-454010-454016

SIAM NSK Steering Systems Co., Ltd.
Chachoengsao tel: 038-522-343-350

NSK Asia Pacific Technology Center (Thailand) Co., Ltd.
Chonburi tel: 038-454631-454633

Vietnam:

NSK Representative Office
Hanoi tel: 04-935-1269

Ho Chi Minh City tel: 08-822-7907

Europe

NSK Europe Ltd.
(European Headquarters)
Maidenhead, U.K. www.eu.nsk.com

tel: 01628-509800

France:

NSK France S.A.S
Paris tel: 01-30-57-39-39

Germany:

NSK Deutschland GmbH
Düsseldorf tel: 02102-481-0

NSK Precision Europe GmbH
Düsseldorf tel: 02102-481-0

NSK Steering Systems Europe Ltd.
Stuttgart tel: 0771-79082-277

Neuweg Fertigung GmbH
Munderkingen tel: 07393-540

Italy:

NSK Italia S.p.A.
Milano tel: 02-995-19-1

Industria Cuscinetti S.p.A.

Torino Plant tel: 0119824811

Netherlands:

NSK European Distribution Centre B.V.
Tilburg tel: 013-4647647

Poland:

NSK Europe Ltd. Warsaw Liaison Office
Warsaw tel: 022-645-1525, 1526

NSK Iskra S.A.
Kielce tel: 041-367-0505

NSK European Technology Center,
Kielce tel: 041-366-5812

NSK Steering Systems Europe (Polska) Sp. z o.o.
Walbrzych tel: 074-664-4101

Spain:

NSK Spain S.A.
Barcelona tel: 093-289-27-63

Turkey:

NSK Bearings Middle East Trading Co., Ltd.
Istanbul tel: 0216-355-0398

United Kingdom:

NSK Bearings Europe Ltd.
Peterlee Plant tel: 0191-586-6111

NSK European Technology Centre
Newark tel: 01636-605123

NSK UK Ltd.
Newark tel: 01636-605123

NSK Precision UK Ltd.
Newark tel: 01636-605123

NSK Steering Systems Europe Ltd.
Coventry tel: 024-76-58858

North and South America

NSK Americas, Inc. (American Headquarters)
Ann Arbor tel: 734-913-7500

Argentina:

NSK Argentina SRL
Buenos Aires tel: 11-4704-5100

Brazil:

NSK Brasil Ltda.
São Paulo www.br.nsk.com

tel: 011-3269-4786

Canada:

NSK Canada Inc.
Toronto www.ca.nsk.com

tel: 905-890-0740

Mexico:

NSK Rodamientos Mexicana, S.A. de C.V.
Mexico City www.mx.nsk.com

tel: 55-5390-4312

United States of America:

NSK Corporation
Ann Arbor www.us.nsk.com

tel: 734-913-7500

NSK American Technology Center
Ann Arbor www.npa.nsk.com

NSK Precision America, Inc. www.nsa.nsk.com

Franklin tel: 317-738-5000

NSK Steering Systems America, Inc. www.nssa.nsk.com

Bennington, Vermont tel: 802-442-5448

NSK Latin America, Inc. www.la.nsk.com

Miami tel: 305-477-0605

NSK Ltd. has a basic policy not to export any products or technology designated as controlled items by export-related laws. When exporting the products in this brochure, the laws of the exporting country must be observed. Specifications are subject to change without notice and without any obligation on the part of the manufacturer. Every care has been taken to ensure the accuracy of the data contained in this brochure, but no liability can be accepted for any loss or damage suffered through errors or omissions. We will gratefully acknowledge any additions or corrections.

For more information about NSK products, please contact: _____



Printed on 100% recycled paper.